

注：出厂时默认C1模式，吸料时间设置为15S，客户可自行更改

C1=吸料时间可调（5-99秒），停机时间固定18秒不可调，

连续三次吸料无料自动报警。

C2=吸料时间等于C1功能的吸料可调时间，停机时间可调（10-99秒），

一次吸料无料自动报警。

C3=吸料时间等于C1功能和吸料可调时间，停机时间可调（1-99分钟），


一次吸料无料自动报警。


Note: The default is C1 mode before leaving the factory. The default is C1 mode before leaving the factory, and customers can change it.

C1=Adjustable suction time (5-99 secs), the constant shutdown time is 18 secs, and it isn't adjustable, and it will alarm automatically once there're three consecutive suction of no materials.

C2= The suction time is equal to the adjustable suction time of C1 function, and the shutdown time is adjustable (10-99 secs), and it will alarm automatically once there's once suction of no materials.

C3= The suction time is equal to the C1 function and suction adjustable time, and the shutdown time is adjustable (1-99 mins) and it will alarm automatically once there's once suction of no materials.

| | | | | | | | | | | | | | | | |
|------------|--|-----|--|-----|--|------|--|---|--|------------------------|--|----------|--|--------|--|
| 机型版本 Ver.A | | | | 制图 | | 版号 A | | 标题 SAL-300-EB | | 图号 SAL-300-EB-230V-A-1 | | 比例 | | 第 1 张 | |
| | | | | 设计 | | 核 准 | | 主电路图 | | | | 标准 GB | | 共 3 张 | |
| | | | | 校对 | | | |  信易電熱機械股份有限公司 Shini Plastics Technologies, Inc. | | | | 机器电压 | | 1φ230V | |
| 标记 | | 更改前 | | 更改后 | | 更改人 | | | | 日期 | | 20221205 | | 机器频率 | |

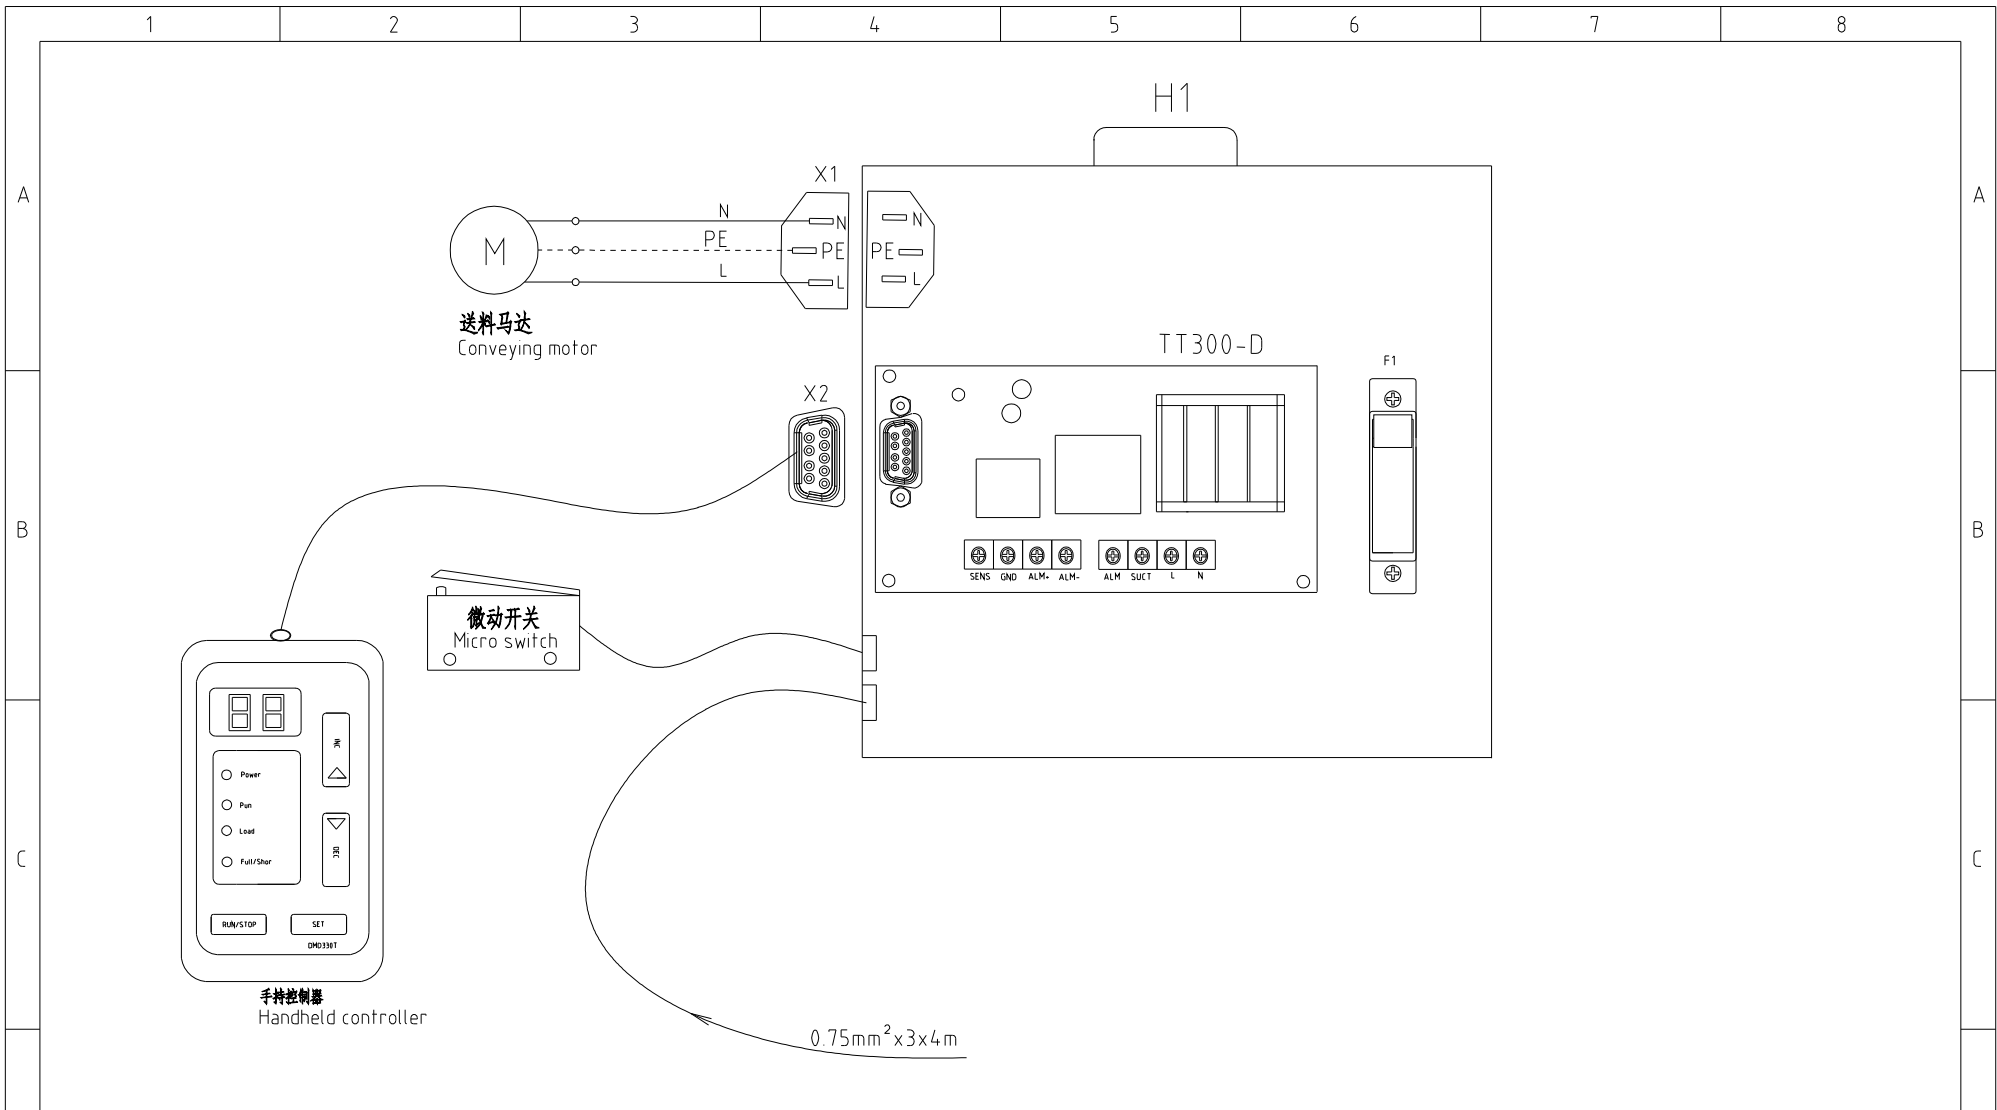

机型版本 Ver. A


| | | | | | | | | |
|----|-----|-----|-----|----|----|--|----|----------|
| | | | | | 制图 | | 版号 | A |
| | | | | | 设计 | | 核 | |
| | | | | | 校对 | | 准 | |
| 标记 | 更改前 | 更改后 | 更改人 | 日期 | 审核 | | 日期 | 20221205 |

标题 SAL-300-EB
电气元件布置图

图号 SAL-300-EB-230V-A-2



| | | |
|------|----|---------|
| 比例 | CE | 第 2 张 |
| 标准 | | 共 3 张 |
| 机器电压 | | 1φ230V |
| 机器频率 | | 50/60Hz |

| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | | 7 | | 8 | |
|-------------|-----------|--|--|------------------|--|------------|--|---|--|------------------------|----------------------|----------|-----------|--------|--|
| 序号/NO | 符号/Symbol | 名称/Name | | 制造商/Manufacturer | | 型号/Type | | 规格/Specification | | 数量/Number | 物料编号/Material number | | 备注/Remark | | |
| 1 | FU1 | 熔断器座/Fuse base | | CHNT | | RT14-20 | | 500VAC 20A | | 1 | YE41142000000 | | | | |
| 2 | | 熔芯/Fuse core | | MRO | | 10x38 | | 20A 500V | | 1 | YE46020000100 | | | | |
| 3 | S2 | 微动开关/Micro switch | | JUCHE | | LXW5-11G2 | | 250V 10A | | 1 | YE14511200000 | | (1) | | |
| 4 | X1 | 品字弯头AC电源插头 (公头) | | HJUN | | AC-06B-10A | | 250V 10A | | 1 | YE80102500100 | | (1) | | |
| 5 | | 品字AC电源插头 (母头) | | HJUN | | AC-00B-10A | | 250V 10A | | 1 | YE80061000100 | | | | |
| 6 | A1 | 微电脑主板/Microcomputer Mainboard | | LONGFENG | | TT300-D | | 220VAC | | 1 | YE80300007400 | | | | |
| 7 | H1 | 报警灯LED 紅白色 <small>Alarm light LED red and white</small> | | SHINI | | LED-3051 | | 220VAC | | 1 | YE83305100200 | | | | |
| 8 | M | 马达/Motor | | AMETEK | | 122508-00 | | 1.2KW 230VAC 50/60Hz | | 1 | --- | | (1) | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| 机型版本 Ver. A | | 注: (1)表示非电控箱安装。 Note: (1) Means not part of control box. | | | | | | | | | | | | | |
| | | | | 制图 | | 版号 A | | 标题 SAL-300-EB | | 图号 SAL-300-EB-230V-A-1 | | 比例 | | 第 3 张 | |
| | | | | 设计 | | 核 准 | | 电气元件明细表一 | | | | 标准 GB | | 共 3 张 | |
| | | | | 校对 | | | |  信易電熱機械股份有限公司 Shini Plastics Technologies, Inc. | | | | 机器电压 | | 1φ230V | |
| 标记 | | 更改前 | | 更改后 | | 更改人 | | | | 日期 | | 20221205 | | 机器频率 | |