




Single Axis Servo Driven Robot

ST1-700-1400DT



Refer carefully to this manual before operation.

■ Coding Principle

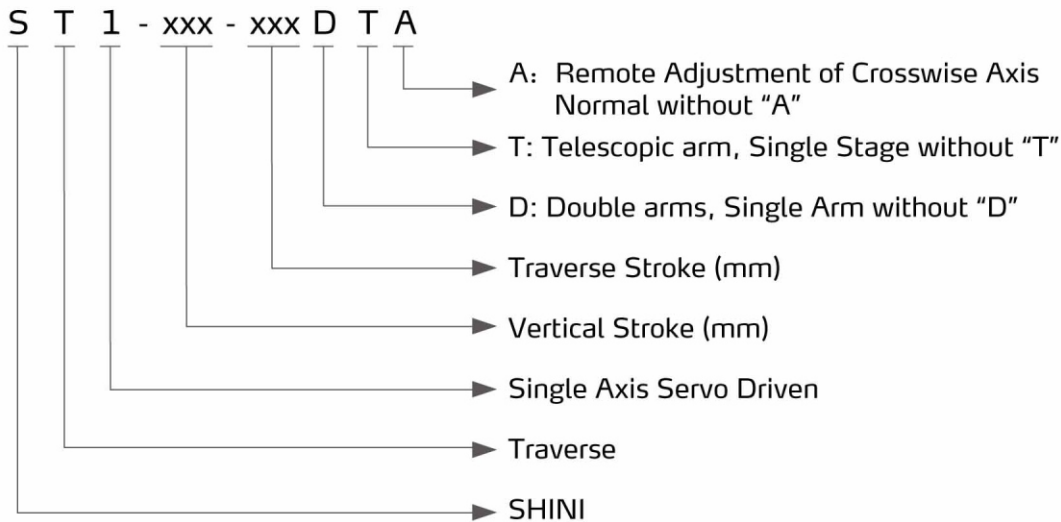

■ Features

● Appearance

Designed with elegant appearance; Aluminium profiles are largely used to provide compact and streamlined appearance.

● Precision

Traverse movement is driven by heavy duty servo motor with cooperation of precise linear guide rails and high power V belts; Fast, silent, and precise. Wrist mechanism employs pneumatic driven rack and pinion system, which accomplishes smooth, stable and precise flipping motion. Vertical arm(s) with telescopic design efficiently minimizes the cycle time and height of the robot.

● Safety

High efficient shock absorbers allow fast and precise pneumatic driven motion. Drop proof locking mechanism prevents accidents due to malfunction of pneumatic source. Position limit sensors and blocks effectively prevent mechanical and electrical malfunctions. Control board is designed to CE EMC test with short circuit and noise proof functions.



ST1-1300-2000DT



ST1-700-1400T

ST1 Series

- Convenience

Vertical and crosswise displacements can be adjusted simply by changing the position limit blocks in easy directions. Control board fixtures are designed with flyer structure which provides benefit to maintenance. Cable drag chains help with cable management and ease for maintenance.

- Standardization

All pneumatic accessories, electric accessories, and communication protocols meet the global standards. Interface between injection molding machine and robot is designed to EUROMAP 12, EUROMAP 67 and SPI.

- Intelligence

User friendly control system and graphical user interface automatically monitor and display error messages with addition of memorizing last 50 errors messages. Flexible and dialogic programming scheme offer 20 standard programs and 80 customized programs.

- User Friendly

Plug and use industrial connectors achieve simple installation and un-installation. Servo driven axis provides the possibility of multi points for positioning products and sprues. Multi languages displays and spares communication connections with surrounds machines offer more flexibilities to global customers.




Control Panel




■ Applications

The ST1 series robot is designed for rapid and precise removal of sprue and products from injection molding machine, and place them at desired locations. Standard and telescopic arm(s) are selectable according to the application of 2-plate mold, 3-plate mold or hot runner system. Stacking function provides 2 stop points in X and Y axis, multiple stop points in Z axis. Suitable for injection molding machine under 850T clamp force.

■ Outline Drawings


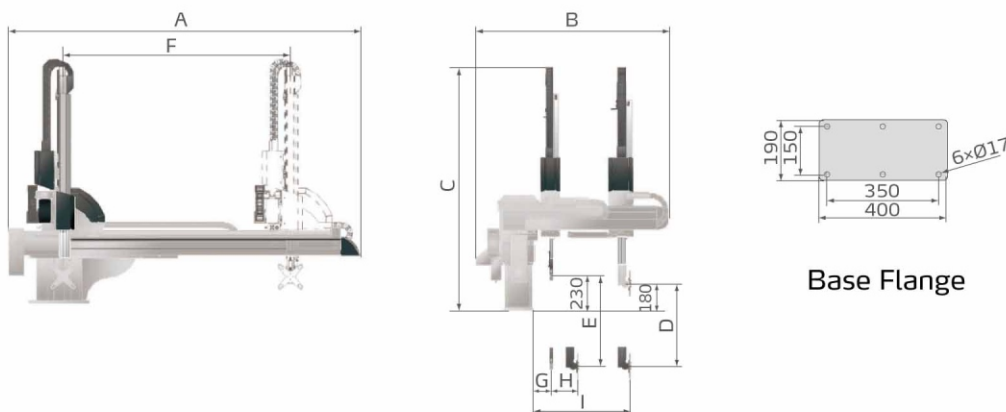


Single Axis Servo

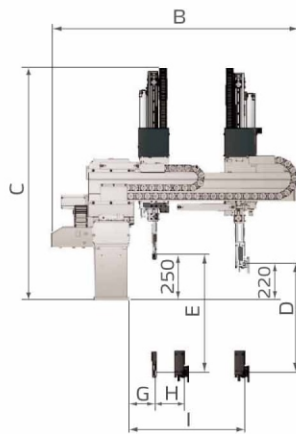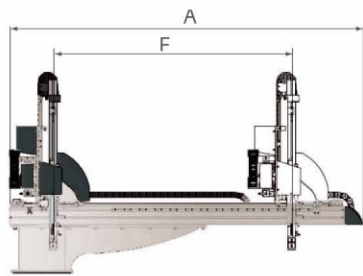

Base Flange

Single Axis Servo Telescopic

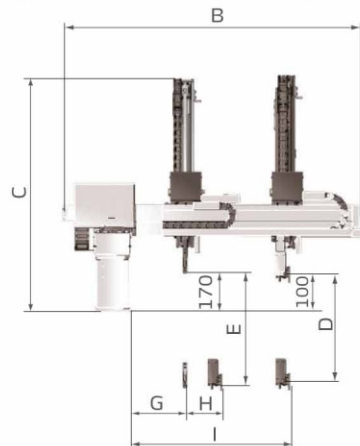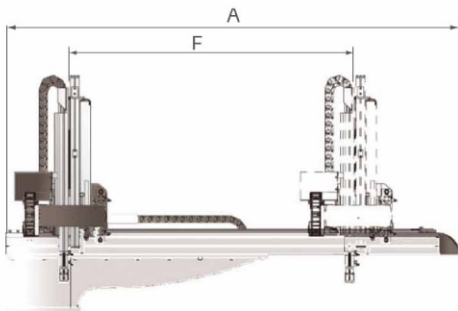

Base Flange

Single Axis Servo Medium Telescopic

■ Specifications

Model(Single stage)		ST1-700-1300	ST1-700-1300D
IMM (ton)		100 ~ 200	100 ~ 200
Traverse Stroke (mm)		1300	1300
Crosswise Stroke (mm)	Main arm	250	250
	Sub arm	/	150
Vertical Stroke (mm)	Main arm	700	700
	Sub arm	/	750
Max Load (with tool) (kg)		3	3
Min Pick-out Time (sec)		2.7	2.7
Min Cycle Time (sec)		8	8
Air Pressure (bar)		4 ~ 6	4 ~ 6
Max Air Consumption (Nl/cycle) *		11	17
Weight (kg)		240	260
Dimensions (mm)	A	2020	2020
	B	1220	1220
	C	1600	1600
	D (max)	700	700
	E (max)	/	750
	F (max)	1300	1300
	G (min)	/	170
	H (min)	/	150
	I (max)	660	660

ST1 Series

Model(Single stage)		ST1-900-1500	ST1-900-1500D	ST1-1100-1800	ST1-1100-1800D
IMM (ton)		200 ~ 300	200 ~ 300	300 ~ 450	300 ~ 450
Traverse Stroke (mm)		1500	1500	1800	1800
Crosswise Stroke (mm)	Main arm	250	250	400	400
	Sub arm	/	150	/	200
Vertical Stroke (mm)	Main arm	900	900	1100	1100
	Sub arm	/	950	/	1150
Max Load (with tool) (kg)		5	5	5	5
Min Pick-out Time (sec)		3	3	3.3	3.3
Min Cycle Time (sec)		9	9	10	10
Air Pressure (bar)		4 ~ 6	4 ~ 6	4 ~ 6	4 ~ 6
Max Air Consumption (NI/cycle) *		15	22	17	26
Weight (kg)		250	270	280	290
Dimensions (mm)	A	2180	2180	2480	2480
	B	1400	1400	1620	1620
	C	1780	1780	1980	1980
	D (max)	900	900	1100	1100
	E (max)	/	950	/	1150
	F (max)	1500	1500	1850	1850
	G (min)	/	170	/	165
	H (min)	/	150	/	160
	I (max)	780	780	1030	1030

- Notes: 1). "M" stands for middle mold detector. (Suitable for three-plate mold.)
 "EM12" stands for EUROMAP 12 communication interface.
 "EM67" stands for EUROMAP 67 communication interface.
 "N" stands for non-operation side,operation side without "N"
 2). Power supply requirement: 1Φ, 200~240V, 50/60Hz.
 3) " * " Extra 60NI/min for vacuum application.

We reserve the right to change specifications without prior notice.

Model (Telescopic)		ST1-700-1300T	ST1-700-1300DT	ST1-900-1500T	ST1-900-1500DT
IMM (ton)		100 ~ 200	100 ~ 200	200 ~ 300	200 ~ 300
Traverse Stroke (mm)		1300	1300	1500	1500
Crosswise Stroke (mm)	Main arm	150	150	250	250
	Sub arm	/	100	/	150
Vertical Stroke (mm)	Main arm	700	700	900	900
	Sub arm	/	750	/	950
Max Load (with tool) (kg)		3	3	3	3
Min Pick-out Time (sec)		2.0	2.3	2.0	2.3
Min Cycle Time (sec)		6.8	6.8	7.2	7.2
Air Pressure (bar)		4 ~ 6	4 ~ 6	4 ~ 6	4 ~ 6
Max Air Consumption (NI/cycle) *		10	16	12	19
Weight (kg)		290	310	300	320
Dimensions (mm)	A	2100	2100	2300	2300
	B	1240	1240	1380	1380
	C	1260	1260	1390	1390
	D(max)	700	700	900	900
	E(max)	/	750	/	950
	F(max)	1300	1300	1500	1500
	G(min)	/	200	/	200
	H(min)	/	150	/	150
	I(max)	690	695	815	815

- Notes: 1). "M" stands for middle mold detector. (Suitable for three-plate mold.)
 "EM12" stands for EUROMAP 12 communication interface.
 "EM67" stands for EUROMAP 67 communication interface.
 "N" stands for non-operation side,operation side without "N"
 2). Power supply requirement: 1Φ, 200~240V, 50/60Hz.
 3). " * " Extra 60NI/min for vacuum application.

We reserve the right to change specifications without prior notice.



Model (Medium Telescopic)	ST1-1100-1800T	ST1-1100-1800DT	ST1-1300-2000T	ST1-1300-2000DT
IMM (ton)	300 ~ 450	300 ~ 450	450 ~ 650	450 ~ 650
Traverse Stroke (mm)	1800	1800	2000	2000
Crosswise Stroke (mm)	Main arm	400	400	400
	Sub arm	/	200	200
Vertical Stroke (mm)	Main arm	1100	1100	1300
	Sub arm	/	1150	1350
Max Load (with tool) (kg)	5	5	5	5
Min Pick-out Time (sec)	2.5	2.5	2.8	2.8
Min Cycle Time (sec)	7.6	7.6	8	8
Air Pressure (bar)	4 ~ 6	4 ~ 6	4 ~ 6	4 ~ 6
Max Air Consumption (NL/cycle) *	24	37	26	41
Weight (kg)	420	450	440	470
Dimensions (mm)	A	2570	2570	2770
	B	1750	1750	1750
	C	1390	1390	1490
	D (max)	1100	1100	1300
	E (max)	/	1150	/
	F (max)	1800	1800	2000
	G (min)	/	120	/
	H (min)	/	180	/
	I (max)	1150	1150	1150

Model (Medium Telescopic)	ST1-1500-2200T	ST1-1500-2200DT
IMM (ton)	650 ~ 850	650 ~ 850
Traverse Stroke (mm)	2200	2200
Crosswise Stroke (mm)	Main arm	400
	Sub arm	/
Vertical Stroke (mm)	Main arm	1500
	Sub arm	/
Max Load (with tool) (kg)	6	6
Min Pick-out Time (sec)	3	3
Min Cycle Time (sec)	8.5	8.5
Air Pressure (bar)	4 ~ 6	4 ~ 6
Max Air Consumption (NL/cycle) *	29	45
Weight (kg)	460	490
Dimensions (mm)	A	2970
	B	1750
	C	1590
	D (max)	1500
	E (max)	/
	F (max)	2200
	G (min)	/
	H (min)	/
	I (max)	1150

- Notes: 1). "M" stands for middle mold detector. (Suitable for three-plate mold.)
 "EM12" stands for EUROMAP 12 communication interface.
 "EM67" stands for EUROMAP 67 communication interface.
 "N" stands for non-operation side, operation side without "N"
 2). Power supply requirement: 1Φ, 200~240V, 50/60Hz.
 3). " * " Extra 60NL/min for vacuum application.

We reserve the right to change specifications without prior notice.

Shini Group

Addr: No. 23, Minhe St., Shulin Dist.,
New Taipei, Taiwan

Tel: +886 2 2680 9119

Fax: +886 2 2680 9229

Email: shini@shini.com

Factories:

- Taiwan
- Dongguan
- Pinghu
- Ningbo
- Chongqing
- Mumbai

2018-03-15-04 Copyrights Reserved.

www.shini.com