



## CFC-free Refrigerant Air-cooled Water Chiller SIC-A-R2

SIC-12A-R2




Refer carefully to this manual before operation.

# SIC-A-R2 Series

## ■ Coding Principle

SIC - xA - R2- xx

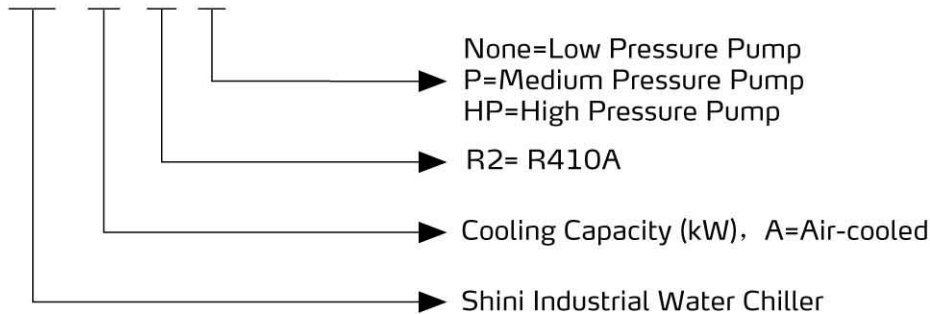

Notes:

CE=CE Conformity

## ■ Features

### Standard configuration

- Cooling range 7~35°C.
- Stainless steel insulated water tank.
- Equipped with anti-freeze thermostat.
- Adopt R410A refrigerant, used to improve coefficient of performance (COP) and R410A is ozone-friendly.
- Refrigerant loop controlled by high and low pressure switches to ensure stable operation.
- Compressor and pump overload protection.
- Adopt precise Italian temperature controller with an accuracy of  $\pm 0.1^{\circ}\text{C}$ .
- Low pressure pump is standard configuration.
- All adopt quality compressors from major supplier.
- Adopt fin style condenser design. Without any need of cooling water for excellent heat transfer and rapid cooling.

### Accessory option

- Medium and high pressure pumps are optional to meet any requirements.
- Lever sensor of water tank is available to detect water level.
- Hot-air bypass valve can be opted to reach the accuracy of  $\pm 1^{\circ}\text{C}$ .
- Solenoid valve is optional to prevent evaporator freezing by cutting the refrigerant immediately after downtime.
- Refrigerant indicator can be opted to detect the refrigerant and ensure its quality and water ratio.
- Optional flow switches to detect chilled water flow.



Control Panel


## ■ Application

SIC-A-R2 series are applicable for cooling moulds to reduce products molding cycle; also they are available in the cooling of equipments in order to maintain a normal temperature. Besides, they are suitable for other industries with the need of cooling.


## Working Principle

When SIC-A-R2 air-cooled water chiller starting-up, compressor starts working. Refrigerant is compressed into high temperature high pressure gas in the process from B to C, and then be cooled when passing through condenser and changed into liquid. Heat is taken away by the cooling air. In the process from C to D to E and F, liquid refrigerant is dried and filtered by the drier filter. After that, it passes through solenoid valve, level sensor and then reaches the expansion valve. In the process from F to G, the high pressure liquid refrigerant is throttled and depressurized by heat expansion valve and temperature goes down. In the process from G to A, chilled water absorbs the heat of process water in evaporator and returns back to the compressor. This heat exchange process repeats until process water is cooled down to requirement temperature.

Hot-air bypass function: the compressor continues working when the process water is cooled down to required temperature, then the hot-air bypass valve opens as the temperature drops to its set value. A part of the refrigerant from compressor passes through by-pass valve and then reaches evaporator, balancing out part of the machine refrigerating capacity and then goes back to compressor without passing through condenser. With the help of hot-air bypass valve, system can stay in balanced condition and meanwhile can keep control accuracy within  $\pm 1^{\circ}\text{C}$ .

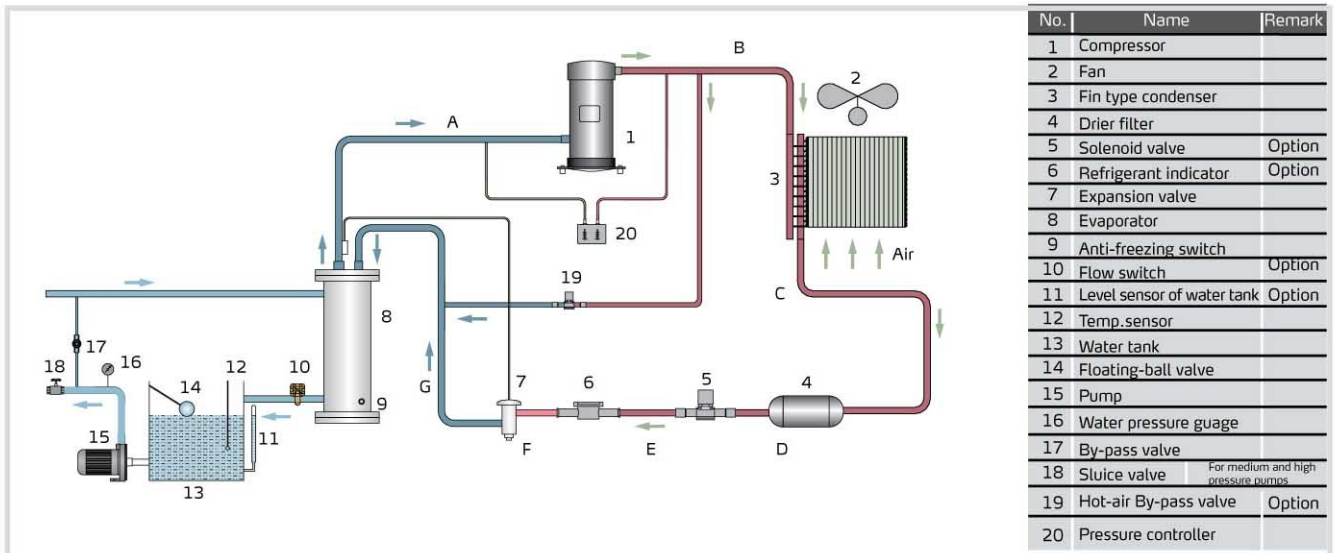


## Outline Drawings

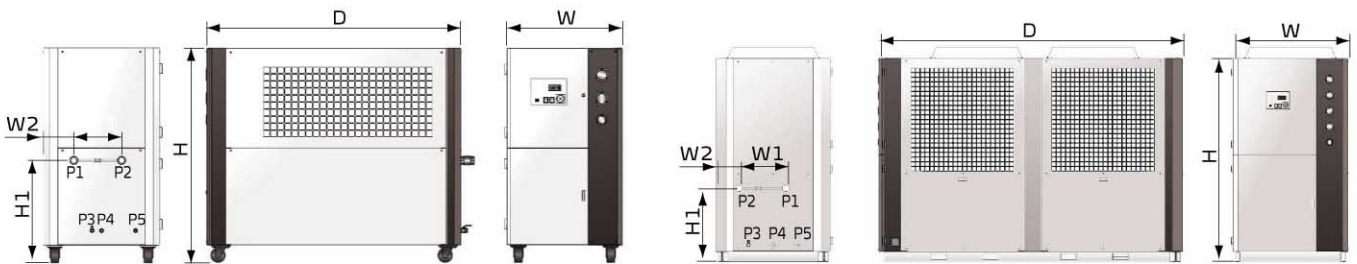

SIC-7.5A-R2~SIC-38A-R2

SIC-48A-R2~SIC-75A-R2

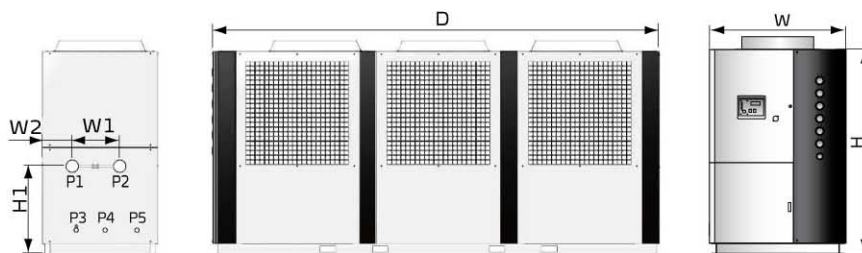

SIC-100A-R2~SIC-114A-R2

# SIC-A-R2 Series

## Outline Drawings

Model	H (mm)	H1 (mm)	W (mm)	W1 (mm)	W2 (mm)	D (mm)	P1 (inch) Cooling Water Inlet	P2 (inch) Cooling Water Outlet	P3 (inch) Water Tank Outlet Port	P4 (inch) Water Tank Overflow Port	P5 (inch) Water Tank Refill Port	Weight (kg)
SIC-7.5A-R2	1200	625	685	277	200	1190	1	1	1/2	1/2	1/2	305
SIC-12A-R2	1490	640	735	360	174	1320	1	1	1/2	1/2	1/2	315
SIC-18A-R2	1430	640	735	300	204	1610	1 <sup>1/2</sup>	1 <sup>1/2</sup>	1/2	1/2	1/2	400
SIC-24A-R2	1440	640	735	300	204	1610	1 <sup>1/2</sup>	1 <sup>1/2</sup>	1/2	1/2	1/2	420
SIC-28A-R2	1560	726	905	390	223	1782	2	2	1/2	1/2	1/2	530
SIC-38A-R2	1560	726	905	390	223	1782	2	2	1/2	1/2	1/2	540
SIC-48A-R2	1942	755	1208	400	257	2922	2	2	1	1/2	1/2	775
SIC-58A-R2	1942	755	1208	400	257	2922	2	2	1	1/2	1/2	800
SIC-75A-R2	1942	755	1208	418	257	2922	2 <sup>1/2</sup>	2 <sup>1/2</sup>	1	1/2	1/2	840
SIC-100A-R2	1942	641	1300	800	243	3475	2 <sup>1/2</sup>	2 <sup>1/2</sup>	1	1	1	1400
SIC-114A-R2	1942	641	1300	900	255	3475	2 <sup>1/2</sup>	2 <sup>1/2</sup>	1	1	1	1600

## Model Selection References

Mould Clamping Force (T)	Molding Capacity (kg/hr)	Refrigeration Capacity (kW)
≤250	≤25	6
≤450	≤45	11
≤650	≤65	14
≤850	≤85	18
≤1300	≤130	27

Mould Clamping Force (T)	Molding Capacity (kg/hr)	Refrigeration Capacity (kW)
≤1800	≤180	38
≤3000	≤300	62
≤4000	≤400	84
≤5000	≤500	104

## Structure of Air-cooled Models



- ① Stainless steel water tank for storage of circulating water.
- ② Big flow 3-phase pump ensures no blockage and high torque.
- ③ High/low pressure gauges to display system pressure.
- ④ Main power switch.
- ⑤ Pump pressure gauge to display pump pressure.
- ⑥ Scroll-type compressor(s) for super high efficiency and low noise.
- ⑦ Expansion valve for accurate adjustment of refrigerant flow.
- ⑧ Tube-fin condenser features quick heat transfer and heat radiation.
- ⑨ Shell-and-tube type evaporator ensures efficient cooling.
- ⑩ Powder coating coated frame and control box.



## Specifications

Item	Model SIC-Parameter	7.5A-R2	12A-R2	18A-R2	24A-R2	28A-R2	38A-R2	48A-R2	58A-R2	75A-R2	100A-R2	114A-R2	
		Refrigerant <sup>1)</sup> Capacity	kW (50Hz/60Hz)	7.5/8.5	12/15.5	18/22.5	24/30	28/35.5	38/45	48/60	58/71	75/90	100/120
	kcal/hr (50Hz/60Hz)	6,450/7,310	10,320/13,072	15,480/19,350	20,640/25,800	24,080/30,530	32,680/38,700	41,280/51,600	49,880/61,060	64,500/77,400	86,000/103,200	98,040/116,100	
Compressor	Type	Scroll											
	Power (50Hz/60Hz)	2.9/3.17	4.2/5.28	6.5/7.8	8.72/10.2	9.36/11.73	12.25/14.8	17.44/20.4	18.72/23.76	24.86/29.6	33.58/39.8	37.29/44.4	
Refrigerant	Filling Volume (kg)	3.5	5.0	5.5	5.5	9.0	12.5	11	15	20	25	30	
	Control Mode	Thermostatic expansion valve											
	Type	R410A											
Evaporator	Type	Tube-in-shell style											
Condenser	Type	Fin style											
	Blower (kW) (50Hz/60Hz)	0.19/0.245	0.55/0.91	2×0.23/2×0.335	2×0.42/2×0.57	2×0.55/2×0.91	2×0.8/2×1.1	2×1.1/2×2.2		2×1.5/2×2.2	2×2.2+1.5/2×2.2+2.2	3×2.2/3×2.2	
Water Tank Capacity (L)		50		85		150		180	200	270	400		
Pump <sup>2)</sup>	Power (kW) (50Hz/60Hz)	0.75/0.75/1.1/-0.75/1.5		1.1/1.1/1.1/-1.1/1.1		1.1/1.5/2.2/-2.2/2.2		2.2/3.0/4.0/-3.0/3.0		4.0/3.0/4.0/-5.5/5.5		4.0/4.0/5.5/-5.5/5.5	
	Pump Flow (L/min) (50Hz/60Hz)	50/83/67/-83/67		80/100/89/-100/89		130/150/133/-150/133		200/300/300/200/300/300		300/300/300/300/300/300		533/366/367/533/366/367	
	Working Pressure (kgf/cm <sup>2</sup> ) (50Hz/60Hz)	2.0/2.6/3.8/-2.6/3.8		2.0/2.6/3.5/-2.6/3.5		2.0/3.0/4.2/-3.0/4.2		2.5/3.0/4.2/2.5/3.0/4.2		2.5/3.0/4.2/2.5/3.0/4.2		2.7/3.4/4.3/2.7/3.4/4.3	
Total Power (kW) <sup>3)</sup> (50Hz/60Hz)		3.85/3.9	5.5/5.86	8.06/8.47	10.6/12.44	11.66/15.74	15/19.2	21.84/27.8	23.12/30.86	31.86/39.5	43.48/51.9	47.89/53.51	
Pipe Coupling (inch)	Chilled Water Outlet (inch) (50Hz/60Hz)	1/1		1 1/2 / 1 1/2				2/2		2.5/2.5			
	Chilled Water Inlet (inch) (50Hz/60Hz)	1/1		1 1/2 / 1 1/2				2/2		2.5/2.5			
	Water Tank Drainage Port			1/2						1			
	Water Tank Overflow Port					1/2						1	
Protective Devices	Compressor	Overload relay											
	Pump	Overload relay											
	Cooling Water Circuit	High and low pressure switches/Anti-freeze switch											
	Water Circuit	Flow switch/Water level switch (Optional)/By-pass valve											
Operation Noise dB(A)		78	75	74	78	81	86	84	82	86	90	90	
Power(VAC) <sup>4)</sup>		3Φ, 230/400/460/575VAC, 50Hz/60Hz											
Measures Exchange		1 kW = 860 kcal/hr			1 RT = 3,024 kcal/hr			10,000 Btu/hr = 2,520 kcal/hr					

- Notes: 1) Refrigeration capacity is measured based on the flow 0.172 m<sup>3</sup> / (h·k W) and the outlet temperature (7 °C) of chilled water under the environment temperature of 35°C.  
 2) Low pressure pump is for domestic and Southeast Asia export, customers can change for medium pressure pumps (use P for short; e.g.: SIC-and A-R2-P) or high pressure pumps (use HP for short; e.g.: SIC-and A-R2-HP), specific parameters in turn as shown above.  
 3) Pump power is included in total power.  
 4) Special orders of machine voltage can be acceptable according to customers's request.  
 5) The air-cooled water chiller is applicable to the conditions under the environment temperature of 43°C.

We reserve the right to change specifications without prior notice.

## Shini Group

Addr.: No. 23, Minhe St., Shulin Dist.,  
New Taipei, Taiwan

Tel: +886 2 2680 9119

Fax: +886 2 2680 9229

Email: [shini@shini.com](mailto:shini@shini.com)

## Factories:

- Taiwan
- Dongguan
- Pinghu
- Ningbo
- Mumbai

2013-01-04-04 Copyrights Reserved.

[www.shini.com](http://www.shini.com)