
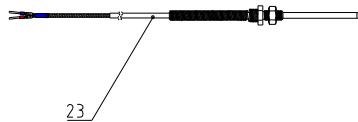
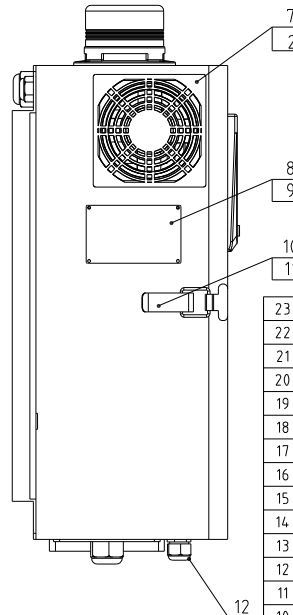
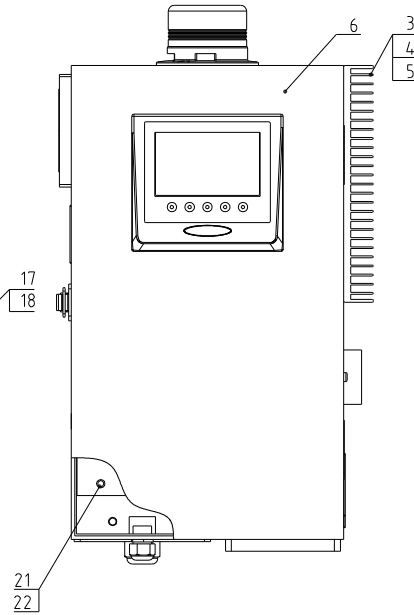
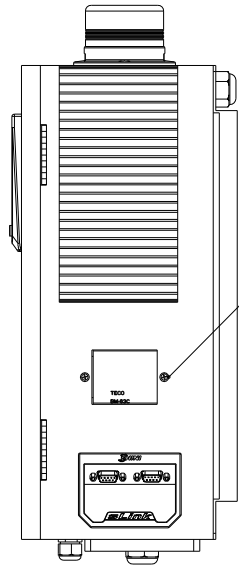
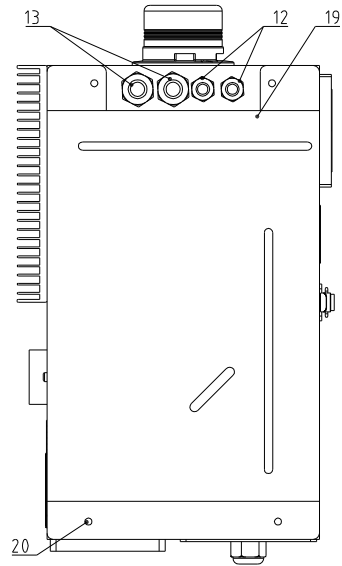


可支持最大热风功率 Can support maximum blower power	可支持最大干燥加热功率 Can support maximum drying heating power	电压等级 Voltage	图纸版本号 Ver.
600W	7.2kW	3Ø400V	Ver. A

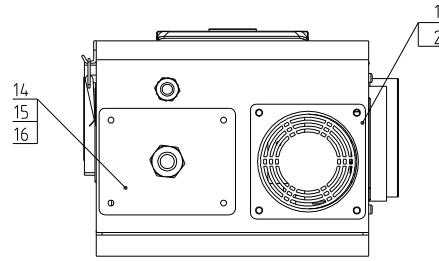

23	YE90530800400	Thermocouple 5 = 30L × M8 × 3M tube type SCD-230U/120H-ALL-08 version 0	assembly	1	
22	YW64000600300	Hexagonal nut GB/T6170 M6-Longzine		4	
21	SEC-150SH-ALL-02	Electrical component installation plate	SECC1.5	1	
20	YW67061500600	Cross recessed pan head tapping screw GB6560 M6×15-Longzine		4	
19	SEC-150SH-ALL-01	Adapter board	SPCC2.0	1	
18	YW67040600600	Cross recessed pan head tapping screw GB6560 M6×6 Longzine		2	
17	BL22080000220	Breaker fixed plate	SPCC1.0	1	
16	YW67051000700	Cross recessed pan head tapping screw GB6560 M6×10 Longzine		4	
15	BL50135000020	Wire fixture fixed plate PG13.5 SG-S-011has mould	SPCC2.0	1	
14	YE67201500200	Copper-nickel-plated cable joint LTL-M20×15(L) Ø×LC/SC2.5×SC for cable	copper-nickel-plated	1	
13	YE67001100000	Cable head PG11		2	
12	YE67000940000	Cable head PG9		3	
11	YW64000300100	Hex nut GB/T6170 M3-Longzine		1	
10	YW63030600000	Cross recessed pan head screw GB/T-823 M3×6-Longzine		1	
9	YW69020500000	Rivet GB/T 827 2×5		4	
8	YP30804900700	Aluminum plate nameplate (small) group universal 80 × 49mm	Aluminum	1	
7	YM60922500100	Exhaust fan - plastic air net 9225A1220V/240V/AC50/60Hz0	Assembly	1	
6	SEC-150SH-A-ALL	Control box	Weldment	1	
5	YW61041000100	Cross socket counter sunk head screw GB819 M6×10-Longzine		4	
4	YW63040600000	Cross recessed pan head screw GB/T818 M6×6-Longzine		4	
3	YW90120700000	Aluminum cooler SD-40H-ALL-281Ver Allblack	AL6063	1	
2	YW62050500000	Cross socket flat-head screw JS1111 M5×5-Longzine		8	
1	YR40090900000	Exhaust fan 3-in-1 dust-proof plastic screen 9×9		1	

制图	版号	标题	图号	比例	1:4	数量		
设计	核准	节能干燥智控系统				材质	/	
校对	审核	信易电热机械股份有限公司 Shini Plastics Technologies, Inc.		表面要求		/		
标记	更改前			更改后	更改人	日期	审核	日期