

NEW!

SHINI

SBI-1000




Shini Blowing Machine in Mold Labeling

■ Features


- Employs console model installation with minimized overall height, separated from blowing machine and avoids any mechanical vibration interference.
- All major axes are servo driven which provides fast and precise motion.

■ Application

The SBI series robot is designed for automatic labeling of bottle product, single face mold or two faces mold with 1, 2, 4 or 8 cavity. Fully automatic labeling helps improving the production efficiency and the product quality.

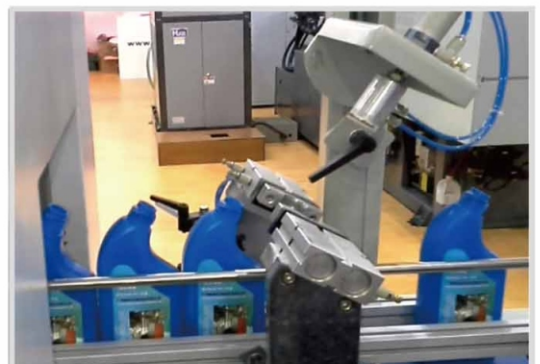

Outline Drawings

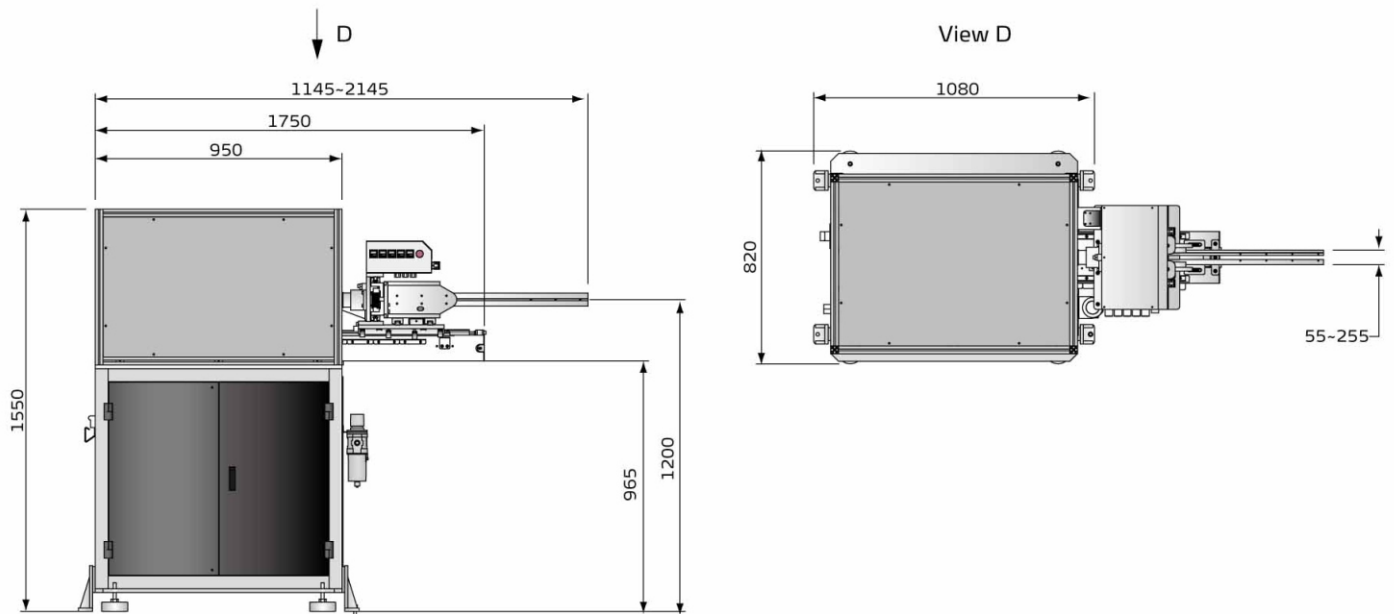

Specifications

Model	SBI-1000
Traverse Stroke (mm)	1000
Crosswise Stroke (mm)	100
Max Load (with tool) (kg)	1
Min in Mold Labeling Time (sec)	0.8
Min Cycle Time (sec)	8
Air Pressure (bar)	4-6
Max Air Consumption (NI/cycle)*	4
Net Weight (kg)	80

Note: 1. Traverse stroke can be customized.

2. "EM12" stands for EUROMAP12 communication interface.

"EM67" stands for EUROMAP67 communication interface.

3. "*"Max air consumption for vacuum device 60NI/min.

4. Power supply requirement: 1Φ, 200~240V, 50/60Hz.

Shini Group

Addr.: No. 23, Minhe St., Shulin Dist., New Taipei, Taiwan

Tel: +886 2 2680 9119

FAX: +886 2 2680 9229

Email: shini@shini.com